



# NCM-1 Noise Control Module

## GENERAL

The Notifier NCM-1 Noise Control Module (patented) is used to reduce common mode noise (noise that is present on both conductors) on the Signaling Line Circuit (SLC). The NCM-1 will allow the use of untwisted, unshielded wire on the SLC. Applications that have audio or fire fighters' telephones require the use of twisted /shielded wiring for all circuits including the SLC. The NCM-1 may still be used in these applications to further reduce common mode noise.

## FEATURES

- Mounts in Cabinet or External
- Use Multiple NCMs for T-Tapped non-shielded connections
- Connects directly to Signaling Circuit
- Pig-Tail Type Connections
- Patented Design (U.S. Patent # 5, 210, 523)


## INSTALLATION

The NCM-1 wires directly in line with the SLC Loop. The NCM-1 includes pig-tail leads to connect the SLC circuit. Read the table following, to determine the maximum wiring distance. All distances are rated at maximum allowable distance and AWG wire.



California State Fire Marshal  
7165-0028:141  
7170-0028:153

**MEA**  
289-91-E

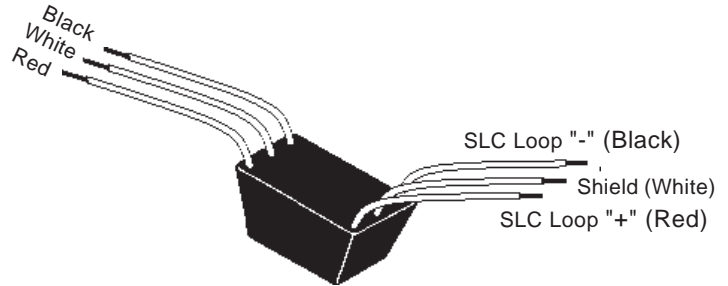

**The NCM-1 Noise Control Module**

Note: For systems without shield, cut white wires

DN-4912

This document is not intended to be used for installation purposes. We try to keep our product information up to date and accurate. We can't cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact **NOTIFIER**. Phone: (203) 484-7161 FAX: (203) 484-7118

**NOTIFIER** 12 Clintonville Road, Northford, Connecticut 06472

**ISO-9001**  
Engineering and Manufacturing  
Quality System Certified to  
International Standard ISO-9001

Made in the U.S.A.

## AIM-200 / AM2020 / AFP1010 SLC WIRING SPECIFICATIONS (NO AUDIO)

CONDUIT?	SHIELD?	TWISTED PAIR?	MORE THAN ONE SLC LOOP?	ACCEPTABLE WIRE AWG.	MAXIMUM DISTANCE PER LOOP
NO	NO	NO	YES	12 - 18	750 feet/loop
			NO	12 - 18	1,000 feet
NO	NO	YES	YES or NO	12 - 18	2,000 feet Per Loop
NO	YES	NO	YES or NO	12 - 18	2,000 feet Per Loop
YES	YES	NO	YES	12 - 18	2,000 feet/loop
			NO	12 - 14	5,000 feet
YES	NO	YES	YES	12 - 18	3,000 feet
			NO	12	10,000 feet <sup>1</sup>
YES	NO	NO	YES	12 - 18	500 feet/loop
			NO	12 - 18	2,000 feet
NO	YES	YES	YES	12	10,000 feet <sup>1</sup>
			NO	12	10,000 feet <sup>1</sup>
YES	YES	YES	YES	12	10,000 feet <sup>1</sup>

Note <sup>1</sup> A smaller gauge wire will support shorter distances as follows:

14 AWG. 8,000 ft. Maximum

16 AWG. 4,875 ft. Maximum

18 AWG. 3,225 ft. Maximum